


# AL-RAJHI PIPES

## الأنابيب الراجحي



# PVC PIPES & FITTINGS

For Cable Ducts, Electrical Conduits, Drainage,  
Sewarage, Irrigation and Water Supply

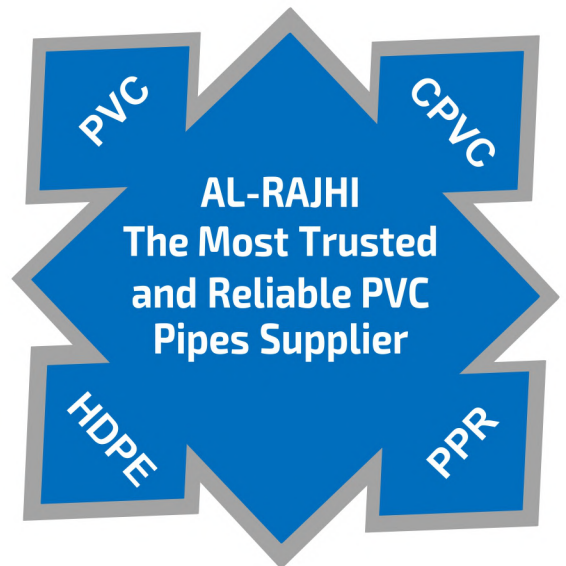

CONSISTENT TO INTERNATIONAL STANDARDS



[www.ALRAJHIPIPES.com](http://www.ALRAJHIPIPES.com)



[INFO@ALRAJHIPIPES.COM](mailto:INFO@ALRAJHIPIPES.COM)

# TABLE OF CONTENTS



## INTRODUCTION

### PVC Pipes

- 2 — Applications of AL-RAJHI PVC Pipes
- 3 — Advantages of AL-RAJHI PVC Pipes
- 4 — Manufacturing & International Standard Specifications

### 5-6 General Properties of PVC Pipes

#### 7 Quality Control

#### PVC Drainage and Sewerage Pipes

- 9 — pipe according to DIN 8062, ISO 161-1
- 10 — Sewer Pipes (Gravity) According to DIN 19534.
- 10 — Drain Pipes According to DIN 19531.
- 11 — Underground Sewer Pipe (Gravity) According to BS 5481
- 11 — Underground Drainage & Sewerage Pipes according to BS
- 11 — Aboveground Soil & Ventilating Pipes according to BS 4514
- 12 — Above ground Waste Pipes according to BS 5255
- 12 — Drain, Waste, Vent Pipes According to ASTM D 2665.
- 13 — Perforated PVC Pipes & Slotted PVC Pipes

#### PVC Electrical and Telecommunication Ducts

- 15 — Electrical Conduits according to DIN 8062
- 15 — Electrical Conduits according to BS 6099
- 16 — Electrical Conduits & Tubing according to NEMA TC-2
- 16 — Utilities Duct according to NEMA TC-6 & ASTM F 512
- 16 — Utilities Duct according to NEMA TC-8 & ASTM F 512

#### PVC Pressure Pipes

- 18 — Pipes according to (SASO 14, DIN 8062, DIN 19532, ISO 161)
- 19 — Pipes According to ASTM D - 1785, Scheule 40 & Schedule80
- 19 — Pressure-rated Pipes According to ASTM D 2241
- 20 — Pipes According to BS 3505 / 3506

### CPVC Pipes

- 22 — General properties
- 24 — Pipes according to ASTM F 441
- 24 — Pipes according to DIN 8079

### PPR Pipes

- 26 — General properties
- 26 — Pipes according to DIN 8077, DIN 8078
- 27-28 — Pipes according to SASO ISO 15874, DIN 8077/78, DIN 53769

### 29-30 PVC Fabricated Products

#### Fittings

- 32 — PVC Fittings properties
- 33 — CPVC Fittings properties
- 34 — Pressure ratings
- 36-37 — PVC Fittings according to ASTM D 2466 S40
- 38 — PVC Fittings according to ASTM D 2467 S80
- 39-40 — CPVC Fittings according to ASTM F-439
- 41 — PVC Fittings according to DIN 8063 PN10
- 42-44 — PPR Fittings



**AL-RAJHI**  
الراجحي

### ABOUT US

Being environmentally conscious, Al-Rajhi Pipes looks to produce products that care for the future. In order to keep standards high, we obtained certification from various agencies and follow all procedures and process needed to fulfill the quality management system.

### OUR MISSION

Al-Rajhi Pipes aims to be the leading producer and supplier of top quality polyvinyl chloride (PVC) in the Middle East. We focus on the development, manufacturing and distribution of our pipes to clients that are looking for suitable price.

### OUR VISION

Our vision is to provide our clients with sustainable PVC pipes at appropriate price in order for us to build a better tomorrow.



## APPLICATIONS OF AL-RAJHI PVC PIPES



### Water supplies

Non-toxic PVC pipes will not affect the taste, color, or smell of drinking water. They will never corrode and are therefore extremely sanitary. Deposits and scales will not build up inside as in the case for conventional steel pipes. Their strength is greater than asbestos pipes.

### Irrigation Systems

AL-RAJHI PVC pipes are ideal for agricultural irrigation and sprinkler systems. Non-corrosive AL-RAJHI PVC pipes are perfect for carrying water which contains chemical fertilizers and insects inhibitors. In thick wall and large diameter AL-RAJHI PVC pipes liquids can be transported under high pressure which is convenient for the management of large farms.



### Industry

Resistant to most chemicals, AL-RAJHI PVC pipes have an important role to play in industrial plants. Light, non-corrosive and easy to assemble they allow more complex piping work than with steel or cast-iron pipes.

### Solid, Waste & Drainage System

Waste line for corrosive gases, ventilation for office buildings and factories; drainage systems for private homes and elevated highways - these are a few of the many possibilities for AL-RAJHI PVC pipes. A full line of PVC fittings is available to assure easy installation.



### Mining

AL-RAJHI PVC pipes particularly are well-suited for draining corrosive liquids found in mines. They make an ideal vent line for pits because they are easily installed in hard to reach places.

### Electrical & Telecommunications Cables

AL-RAJHI PVC pipes form an integral insulator, hence there is an ever-increasing demand for them as electrical conduit. To facilitate work, a full line of fittings is available and fabricated from the same material as the pipes.



### AL-RAJHI PVC pipes for Casing and Screen

Engineering difficulties and the probability of adverse chemical reactions make it impractical to overcome corrosion and encrustation through the use of protective coating, chemical treatment or cathodic protection. Thus AL-RAJHI non-corrosion PVC for water well casing and screens rapidly received approval by the appropriate ministry consultants and engineers.

## GENERAL ADVANTAGES OF PVC PIPES

AL-Rajhi PVC pipes provide numerous advantages in various applications. These pipes are highly durable, offering excellent resistance to corrosion, chemicals, and UV rays. They are lightweight, making them easy to handle and install. Additionally, AL-Rajhi PVC pipes require minimal maintenance, ensuring long-term reliability and cost-effectiveness. Their superior performance and adherence to international standards make them a preferred choice for plumbing, drainage, and irrigation systems.



### NON-CORROSION

ALRAJHIPIPES PVC pipes resist corrosion caused by acid, alkalis, oils, salts, moisture and the media inside and outside the pipe. It is particularly reliable for resistance to the severe climatic and soil conditions in Saudi Arabia.

### SANITARY

ALRAJHIPIPES PVC pipes are entirely non-toxic. It will not affect the taste, smell or colour of water or liquid not react with any liquid to cause a precipitant.



### LOW FLOW LOSS

ALRAJHIPIPES PVC pipes have a mirror-smooth surface which minimize resistance and impede the build-up of deposits and corrosive scales.

### MECHANICAL STRENGTH

ALRAJHIPIPES PVC pipes have great tensile strength yet they are flexible enough to withstand displacement in the pipe line. They will not dent or flatten under pressure.



### LIGHT WEIGHT

ALRAJHIPIPES PVC pipes are incredibly light. Their specific weight is one fifth of steel pipe. This cuts down transportation costs and facilitates the installation of pipes and reduces its cost.

### EASE OF INSTALLATION

ALRAJHIPIPES PVC pipes are quick and easy to install, with a complete range of fittings, using solvent cement or rubber joints. Joints are leakproof. PVC pipes can be cut easily for installation.



### FIRE RESISTANCE

ALRAJHIPIPES PVC pipes will not support combustion. In the event of fire, flames are unable to travel along the pipe. It is self extinguishing.

### INSULATOR

ALRAJHIPIPES PVC pipe are ideal for electric conduits. Because PVC itself is an integral insulator, it eliminates the possibility of electrolytic corrosion which so often destroys underground piping.





## TECHNICAL SPECIFICATIONS & INTERNATIONAL STANDARDS



DIN 8062, 19531, 19532, 19534



ASTM 1785, D-2241, F-512



BS 3505, 3506, 5481, 4660, 4514, 5255, 2665, 6099



EN 1452



NEMA TC-2, TC-6, TC-8V



SASO 14

### Range of Production

Pipes from ALRAJHIPIPES are supplied according to SASO and or DIN Standards from 20mm, up to 800mm outside diameter in various pressure classes.

PVC pipes are available with solvent weld Socket joints for diameters less than 63mm. Sizes of outside diameter 63mm and larger are available with both mechanical rubber ring joints or solvent weld Socket joints.

Pipes will be supplied in accordance with ASTM are ranging from 1/2 inch up to 8 inches in various pressure (SCH40, SCH 80) with white and gray colour.

ASTM Pipes are available with plain spigot and Solvent Cement joints only. ALRAJHIPIPES pipes are produced in 6 meters standard length (other lengths are available on request), standard colours are grey, white and black (other colours are available on request).



## GENERAL PROPERTIES

### Material Technical Data

Properties	Unit	PVC	Test Method
<b>Physical Properties</b>			
Specific Gravity (Compound)	g/cm <sup>3</sup>	1.4 - 1.42	ASTM D 792
Water Absorption (24 H Boiling Water)	mg/cm <sup>2</sup>	< 4	ISO 2508
Water Absorption (24 H at 23 °C)	% weight gain	0.05	ASTM D 570
Flammability	N/A	Self extinguishing	-
Resistance To Burning	Sec	< 5	ASTM D 635
Vicat Softening Temperature (VST 5 Kgf)	°C	> 80	ISO 306
Thermal Conductivity	W k <sup>-1</sup> m <sup>-1</sup>	0.15	DIN 52612-1
Co-Efficient Of Thermal Linear Expansion	mm/mm °C	0.8x10 <sup>-4</sup>	ASTM D 696
Specific Heat	Cal/g °C	0.25	-
<b>Mechanical Properties</b>			
Tensile Strength @ 23 °C Minimum	Mpa	50	ASTM D 638
Tensile Modulus Of Elasticity @ 23 °C	Mpa	3000	ASTM D638
Compressive Strength @ 23 °C	Mpa	65	ASTM D 695
Flexural Strength @ 23 °C	Mpa	89	ASTM D 790
Poisson's Ratio @ 23 °C	-	0.38	-
Izod Impact Strength (Notched) @ 23 °C	J/m ft.lbs/in.	53 1.0	ASTM D 256
Hardness Strength @ 23 °C	Durometer "D"	80	ASTM D 2240
	R <sup>o</sup> ckwell "R"	110	ASTM D 785
<b>Electrical Properties</b>			
Volume Resistivity @ 23 °C	Ohm/cm	3x10 <sup>15</sup>	ASTM D 257
Surface Resistivity	Ohm	> 10 <sup>12</sup>	DIN IEC60093
Power Factor@ 60 HZ	%	1.255	ASTM D 150
Dielectric Strength	Volts / mm	1400	ASTM D 147
Dielectric Constant 60Hz @ 30 °F	-	3.70	ASTM D 150

Above mentioned values may varied according to compounds and products\*





### Allowable working pressure for pipes made of PVC conveying water

Safety factor C = 2.5

Temperature °C	Years of Service	Pipe Series S			
		25	16.7	10	6.3
		Standard dimension ratio (SDR)			
		51	34.4	21	13.6
		Class 2	Class 3	Class 4	Class 5
Allowable working pressure (bar)					
10	5	5.2	7.8	13	20.9
	10	5.1	7.6	12.7	20.4
	25	4.9	7.4	12.3	19.7
	50	4.8	7.2	12.0	19.3
	100	4.7	7.1	11.8	18.8
20	5	4.4	6.6	11.0	17.5
	10	4.3	6.4	10.7	17.1
	25	4.1	6.2	10.3	16.4
	50	4.0	6.0	10.0	16.0
	100	3.9	5.8	9.7	15.6
30	5	3.5	5.3	8.8	14.1
	10	3.4	5.1	8.6	13.7
	25	3.3	4.9	8.2	13.2
	50	3.2	4.8	8.0	12.7
	100	3.1	4.7	7.9	12.4
40	5	2.7	4.1	6.8	10.8
	10	2.6	3.9	6.5	10.4
	25	2.5	3.7	6.2	9.9
	50	2.4	3.6	6.0	9.6
	100	2.3	3.5	5.9	9.3
50	5	1.9	2.9	4.8	7.6
	10	1.8	2.7	4.6	7.3
	25	1.7	2.6	4.3	6.9
	50	1.6	2.5	4.2	6.6
60	5	1.2	1.8	3.0	4.8
	10	1.1	1.7	2.8	4.4
	25	1.1	1.6	2.6	4.2


### Thermal de-rating factors for PVC pressure pipes and fittings

Maximum service temperature (°C)	Multiply working pressure at (20 °C) by these factors
20	1
25	0.9
30	0.8
35	0.7
40	0.6

### PVC pipe length variation due to temperature change (°C)

Temperature Change (°C)	Length Variation mm/meter
5	0.4
10	0.8
15	1.2
20	1.6
25	2.0
30	2.4
35	2.8
40	3.2
45	3.6
50	4.0
55	4.4
60	4.8

Coefficient of thermal expansion = 0.08 mm/m/°C

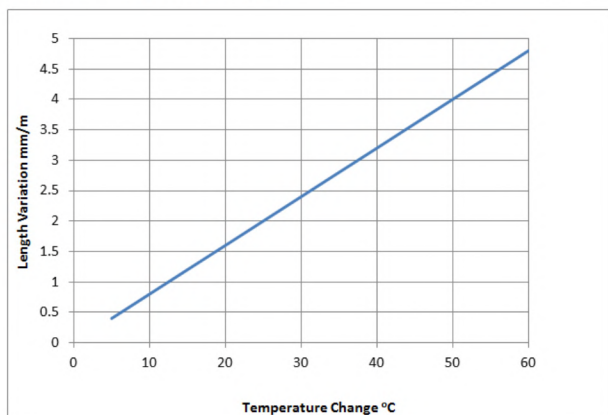



### Quality Control Testing

Al-Rajhi Plastics is equipped with a testing laboratory having a fully trained staff for evaluation of raw materials and finished pipes

In order to maintain uniform quality level, all our routine control tests are carried out as per SAS, and DIN Standards.



### إختبارات الجودة

لقد زود مصنع بلاستيك الراجحي بمختبرات على أعلى المستويات الفنية تحت إشراف مجموعة من المختصين من ذوي الخبرة ليؤكدوا أفضل مستويات الجودة بدءاً من المواد الأولية وانتهاءً بالأنابيب الجاهزة للاستعمال.

إن هذه المجموعة تعمل وبكل كفاءة لتبقى أنابيب الوطنية بجودتها المميزة و المطابقة بمواصفاتها لنظام المواصفات السعودية المتفق مع نظام المواصفات الألماني





**AL-RAJHI** **الراجحي**

# PVC DRAINAGE AND SEWERAGE PIPES

## PVC pipe according to DIN 8062, ISO 161-1

Class		Class 1		Class 2		Class 3		Class 4	
Nominal Pressure in Bars		2 BAR		4 BAR		6 BAR		10 BAR	
Nom-OD (mm)	Tolerance on Nom-OD (mm)	Nom-wall thickness (mm)	Nom- wt. kg/m	Nom-wall thickness (mm)	Nom- wt. kg/m	Nom-wall thickness (mm)	Nom-wt. kg/m	Nom-wall thickness (mm)	Nom-wt. kg/m
25	+0.2							1.5	0.174
32	+0.2							1.8	0.264
40	+0.2					1.8	0.334	1.9	0.350
50	+0.2					1.8	0.422	2.4	0.552
63	+0.2					1.9	0.563	3.0	0.854
75	+0.3			1.8	0.642	2.2	0.782	3.6	1.22
90	+0.3			1.8	0.774	2.7	1.13	4.3	1.75
110	+0.3	1.8	0.950	2.2	1.16	3.2	1.64	5.3	2.61
125	+0.3	1.8	1.08	2.5	1.48	3.7	2.13	6.0	3.64
140	+0.4	1.8	1.21	2.8	1.84	4.1	2.65	6.7	4.18
160	+0.4	1.8	1.39	3.2	2.41	4.7	3.44	7.7	5.47
180	+0.4	1.8	1.57	3.6	3.02	5.3	4.37	8.6	6.88
200	+0.4	1.8	1.74	4.0	3.70	5.9	5.37	9.6	8.51
225	+0.5	1.8	1.96	4.5	4.70	6.6	6.76	10.8	10.8
250	+0.5	2.0	2.40	4.9	5.65	7.3	8.31	11.9	13.2
280	+0.6	2.3	3.11	5.5	7.11	8.2	10.4	13.4	16.6
315	+0.6	2.5	3.78	6.2	9.02	9.2	13.2	15.0	20.9
355	+0.7	2.9	4.88	7.0	11.4	10.4	16.7	16.9	26.5
400	+0.7	3.2	6.10	7.9	14.5	11.7	21.1	19.1	33.7
450	+0.8	3.6	7.65	8.9	18.3	13.2	26.8	21.5	42.7
500	+0.9	4.0	9.38	9.8	22.4	14.6	32.9	23.9	52.6
560	+1.0	4.2	11.8	11.0	28.1	16.4	41.4	26.7	65.8
630	+1.1	2.0	14.7	12.4	35.7	18.4	52.2	30.0	83.2
710	+1.2	5.7	18.9	14.0	45.3	20.7	66.1		
800	+1.3	6.4	23.9	15.7	57.2	23.3	83.9		

**Length** : 6 meters (Other lengths are available on request).

**Colour** : Grey.

**Socket Type** Rubber joint (R/J) type supplied from sizes 63mm up to 800mm. Solvent Cement (SC/J) type supplied from sizes 20mm up to 800mm.

Country Standard





## PVC Sewer Pipes (Gravity) According to DIN 19534.

Applications : Sewerage Pipe Underground

Nominal Size (mm)	Outside Diameter (mm)		Wall Thickness (mm)		Insertion Depth (mm)	Weight kg/m
	(D)	Tolerance	(S)	Tolerance		
110	110	0.3	3.0	0.5 +	115	1.63
125	125	0.3	3.0	0.5 +	120	1.870
160	160	0.4	3.6	0.6 +	132	2.650
200	200	0.4	4.5	0.7 +	145	4.120
250	250	0.5	6.1	0.9 +	160	7.00
315	315	0.6	7.7	1.0 +	180	11.110
400	400	0.7	9.8	1.2 +	200	17.800
500	500	0.9	12.2	1.5 +	250	27.649
600	630	1.1	15.4	1.8 +	300	43.944

**LENGTH** : 6 meters (Other lengths are available on request.)  
**COLOUR** : Golden Brown.  
**SOCKET TYPE:** Solvent cement (SC/J) type, Rubber Joint (R/J) type.

Country Standard 

## PVC Drain Pipes According to DIN 19531.

Applications : Waste & Soil discharge systems inside buildings

Nominal Size (mm)	Outside Diameter (mm)		Wall Thickness (mm)		Weight kg/m
	Min	Max	Min	Max	
40	40.0	40.2	1.8	2.2	0.381
50	50.0	50.2	1.8	2.2	0.481
75	75.0	75.3	1.8	2.2	0.642
110	110.0	110.3	2.2	2.7	1.160
125	125.0	125.3	2.5	3.0	1.480
160	160.0	160.4	3.2	3.8	2.410

**LENGTH** : 6 meters (Other lengths are available on request.)  
**COLOUR** : Grey.  
**SOCKET TYPE:** Solvent cement (SC/J) type, Rubber Joint (R/J) type

Country Standard 

## PVC Underground Sewer Pipe (Gravity) According to BS 5481

Applications : Gravity Sewerage Underground

Nominal Size	Outside Diameter (mm)		Wall Thickness (mm)		Weight kg/m
	Min	Max	Min	Max	
200 (8")	200.0	200.6	4.9	5.6	4.50
250 (10")	250.0	250.7	6.1	7.0	7.01
315 (12")	315.0	315.9	7.7	8.7	11.07
400 (16")	400.0	401.0	9.8	11.0	17.83

**LENGTH** : 5.8 & 6 meters (Other lengths are available on request).  
**COLOUR** : Golden Brown.  
**SOCKET TYPE**: Solvent cement (SC/J) type, Rubber Joint (R/J) type

Country Standard 

## PVC Underground Drainage & Sewerage Pipes according to BS 4660

Applications : Drainage Under Gardens, Fields, Driveways & Roads

Nominal Size	Outside Diameter (mm)		Wall Thickness (mm)		Weight kg/m
	Min	Max	Min	Max	
110 (4")	110.0	110.4	3.2	3.8	1.64
160 (6")	160.0	160.6	4.1	4.8	3.04

**LENGTH** : 5.8 & 6 meters (Other lengths are available on request).  
**COLOUR** : Golden Brown.  
**SOCKET TYPE**: Solvent cement (SC/J) type, Rubber Joint (R/J) type

Country Standard 

## PVC Aboveground Soil & Ventilating Pipes according to BS 4514

Applications : Soil & Ventilating Pipes Aboveground

Nominal Size	Outside Diameter (mm)		Wall Thickness (mm)		Weight kg/m
	Min	Max	Min	Max	
82 (3")	82.4	82.8	3.2	3.8	1.21
110 (4")	110.0	110.4	3.2	3.8	1.64
160 (6")	160.0	160.6	3.3	3.9	2.47

**LENGTH** : 5.8 & 6 meters (Other lengths are available on request).  
**COLOUR** : Golden Brown.  
**SOCKET TYPE**: Solvent cement (SC/J) type, Rubber Joint (R/J) type Non standard lengths & colours available on request.

Country Standard 



## PVC Aboveground Waste Pipes according to BS 5255

Applications : Waste Aboveground

Nominal Size	Outside Diameter mm		Wall Thickness (mm)		Weight kg/m
	Min	Max	Min	Max	
32 (1 1/4")	36.15	36.45	1.8	2.2	0.301
40 (1 1/2")	42.75	43.05	1.9	2.3	0.376
50 (2")	55.75	56.05	2.0	2.4	0.519

Nominal Size	)Outside Diameter )mm		)Wall Thickness )mm		Weight kg/m
	Min	Max	Min	Max	
("4/11) 32	36.15	36.45	1.8	2.2	0.301
("2/11) 40	42.75	43.05	2.3	2.8	0.452
("2) 50	55.75	56.05	2.4	2.9	0.620

Note: Table (b) for waste pipes - Cold water

**LENGTH** : 4, 5.8 & 6 meters (Other lengths are available on request).  
**COLOUR** : Grey.  
**SOCKET TYPE** Solvent cement (SC/J) type, Rubber Joint (R/J) type  
 Non standard lengths & colours available on request.

Country Standard 

## PVC Drain, Waste, Vent Pipes According to ASTM D 2665.

Applications : Drain, Waste, Vent (DWV)

Nominal Size (inch)	Outside Diameter (mm)		Wall Thickness (mm)		Weight kg/m
	Min	Max	Min	Max	
1 1/4	42.03	42.29	3.56	4.07	0.65
1 1/2	48.11	48.41	3.68	4.19	0.77
2	60.18	60.48	3.91	4.42	1.04
3	88.7	89.1	5.49	6.15	2.14
4	114.07	114.53	6.02	6.73	3.05
6	168.0	168.56	7.11	7.97	5.37
8	218.7	219.46	8.18	9.17	8.11

**LENGTH** : 5.8 & 6 meters (Other lengths are available on request).  
**COLOUR** : White.  
**SOCKET TYPE**: Plain, Solvent cement (SC/J)  
 Non standard lengths & colours available on request.


Country Standard 

AL-RAJHI perforated or slotted PVC pipes are supplied upon request depending on the size and class of the pipes. Below given


## PERFORATED PIPES

figures is a general configuration which may vary as per clients requirements.

(Staggered Rows)




(Straight Rows)

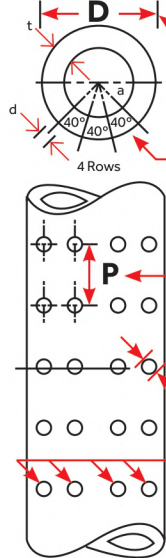


Range of sizes	75 mm to 500 mm
Angular pitch of holes	40° for 3 or 4 rows 40°, 80° or 120° for 2 rows
Longitudinal pitch of holes (LP)	50 mm to 200 mm
Hole Diameter	6 mm to 13 mm
Number of rows	1 to 6

### B) SLOTTED PIPE


(Straight Slots)



(Staggered Slots)



Slot length	Depends on the size
Slot width	1, 1 1/2, 2 & 3 mm
No. of Rows	4, 6 & 8 (but according to the size)
Slot Angle (Sector)	Recommended by <b>AL-RAJHI PIPES</b>

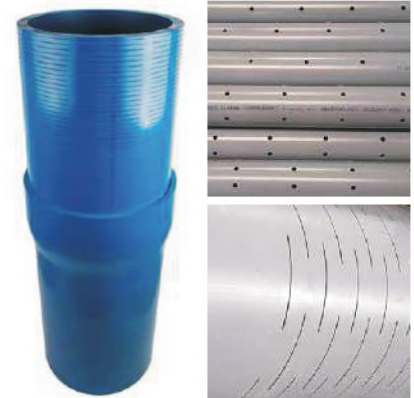

For further details please refer to National Marketing Technical Sales Department



**الراجحي AL-RAJHI**

# **PVC ELECTRICAL AND TELECOMMUNICATION DUCT**





## PVC Electrical Conduits according to DIN 8062

Applications: Electrical installations.

Nominal OD (mm)	Class 2		Class 3	
	Wall Thickness (mm)	Weight kg/m	Wall Thickness (mm)	Weight kg/m
40	-	-	1.8	0.334
50	-	-	1.8	0.422
63	-	-	1.9	0.562
75	1.8	0.642	2.2	0.782
90	1.8	0.774	2.7	1.13
110	2.2	1.16	3.2	1.64
125	2.5	1.48	3.7	2.13
140	2.8	1.84	4.1	2.65
160	3.2	2.41	4.7	3.44
200	4.0	3.70	5.9	5.37
225	4.5	4.70	6.6	6.76
250	4.9	5.65	7.3	8.31
280	5.5	7.11	8.2	10.4
315	6.2	9.02	9.2	13.2
400	7.9	14.5	11.7	21.1

**Length** : 6 meters (Other lengths are available on request).  
**Colour** : Grey.  
**Socket Type**: Solvent cement (SC/J) type.

Country Standard 

## PVC Electrical Conduits according to BS 6099

Applications: Electrical installations.

Nominal Size (mm)	Minimum Inside Diameter (mm)			Maximum Wall Thickness mm			Weight kg/m		
	Light	Medium	Heavy	Light	Medium	Heavy	Light	Medium	Heavy
16	13.7	13.0	12.2	1.15	1.5	1.9	0.080	0.100	0.125
20	17.4	16.9	15.8	1.3	1.55	2.1	0.120	0.140	0.180
25	22.1	21.9	20.6	1.45	1.8	2.2	0.165	0.200	0.240
32	28.6	27.8	26.6	1.7	2.1	2.7	0.245	0.296	0.370
40	35.8	35.4	34.4	2.1	2.3	2.8	0.352	0.406	0.485
50	45.1	44.3	43.2	2.45	2.85	3.4	0.540	0.622	0.707
63	57.0	-	-	3.0	-	-	0.830	-	-

**Length** : 3 meters (Other lengths are available on request).  
**Colour** : Black/White.  
**Socket Type**: Plain, Solvent cement (SC/J) type

Country Standard 



## PVC Electrical Conduits & Tubing according to NEMA TC-2

EPT Electrical plastic tubing for encasement in concrete, EPC 40 Electrical plastic conduit for direct burial underground, EPC 80 Electrical plastic conduit for heavy duty.

Nominal Size inch	Outside diameter (mm)		Wall Thickness (mm)						Weight kg/m		
			EPT		EPC 40		EPC 80		EPT	EPC 40	EPC 80
	min	max	min	max	min	max	min	max			
1/2	21.24	21.44	1.52	2.03	2.77	3.28	3.73	4.24	0.155	0.24	0.3
3/4	26.57	26.77	1.52	2.03	2.87	3.38	3.91	4.24	0.197	0.33	0.43
1	33.27	33.53	1.52	2.03	3.38	3.89	4.55	5.08	0.25	0.48	0.61
1 1/4	42.03	42.29	1.78	2.29	3.56	4.07	4.85	5.44	0.365	0.65	0.87
1 1/2	48.11	48.41	2.03	2.54	3.68	4.19	5.08	5.69	0.47	0.77	1.03
2	60.17	60.47	2.54	3.05	3.91	4.42	5.54	6.2	0.717	1.04	1.43
2 1/2	72.84	73.2	2.79	3.30	5.16	5.77	7.01	7.85	0.952	1.57	2.2
3	88.70	89.1	3.18	3.68	5.49	6.15	7.62	8.53	1.31	2.14	2.91
4	114.1	114.5	3.81	4.32	6.02	6.73	8.56	9.58	2.0	3.05	4.26
5	141.05	141.55	-	-	6.22	7.347	9.52	10.67	- 4.18		6.42
6	168.0	168.56	-	-	7.11	7.98	10.97	12.29	- 5.37		8.13
8	218.7	219.46	-	-	8.18	9.17	12.7	14.22	- 8.11		12.4

## PVC Electrical Conduits & Tubing according to NEMA TC-6 & ASTM F 512

Applications: Type EB for encased burial in concrete, Type DB for direct burial without concrete.

Nominal Size (inch)	Outside Diameter (mm)	PVC type EB 20		PVC type DB 60	
		Wall Thickness (mm)	Weight kg/m	Wall Thickness (mm)	Weight kg/m
2	60.17	1.52	0.465	1.52	0.465
3	88.7	1.55	0.703	2.34	1.000
4	114.1	2.08	1.170	3.07	1.650
5	141.05	2.62	1.170	3.86	2.50
6	168.0	3.18	2.530	4.62	3.570

## PVC Electrical Conduits & Tubing according to NEMA TC-8 & ASTM F 512

Applications: Type EB for encased burial in concrete, Type DB for direct burial without concrete.

Nominal Size (inch)	Outside Diameter (mm)	PVC type EB 35		PVC type DB 120	
		Wall Thickness (mm)	Weight kg/m	Wall Thickness (mm)	Weight kg/m
1	33.27	-	-	1.52	0.251
1 1/2	48.11	-	-	1.52	0.369
2	60.17	1.52	0.465	1.96	0.576
3	88.7	1.93	0.847	3.00	1.250
4	114.1	2.54	1.390	3.91	2.050
5	141.05	3.2	2.09	4.85	3.12
6	168.0	3.86	3.020	5.77	4.420


**Length** : 5.8 & 6 meters (Other lengths are available on request).  
**Colour** : Grey.  
**Socket Type** Solvent cement (SC/I) type





AL-RAJHI **الراجحي**

# AL-RAJHI PVC PRESSURE PIPES

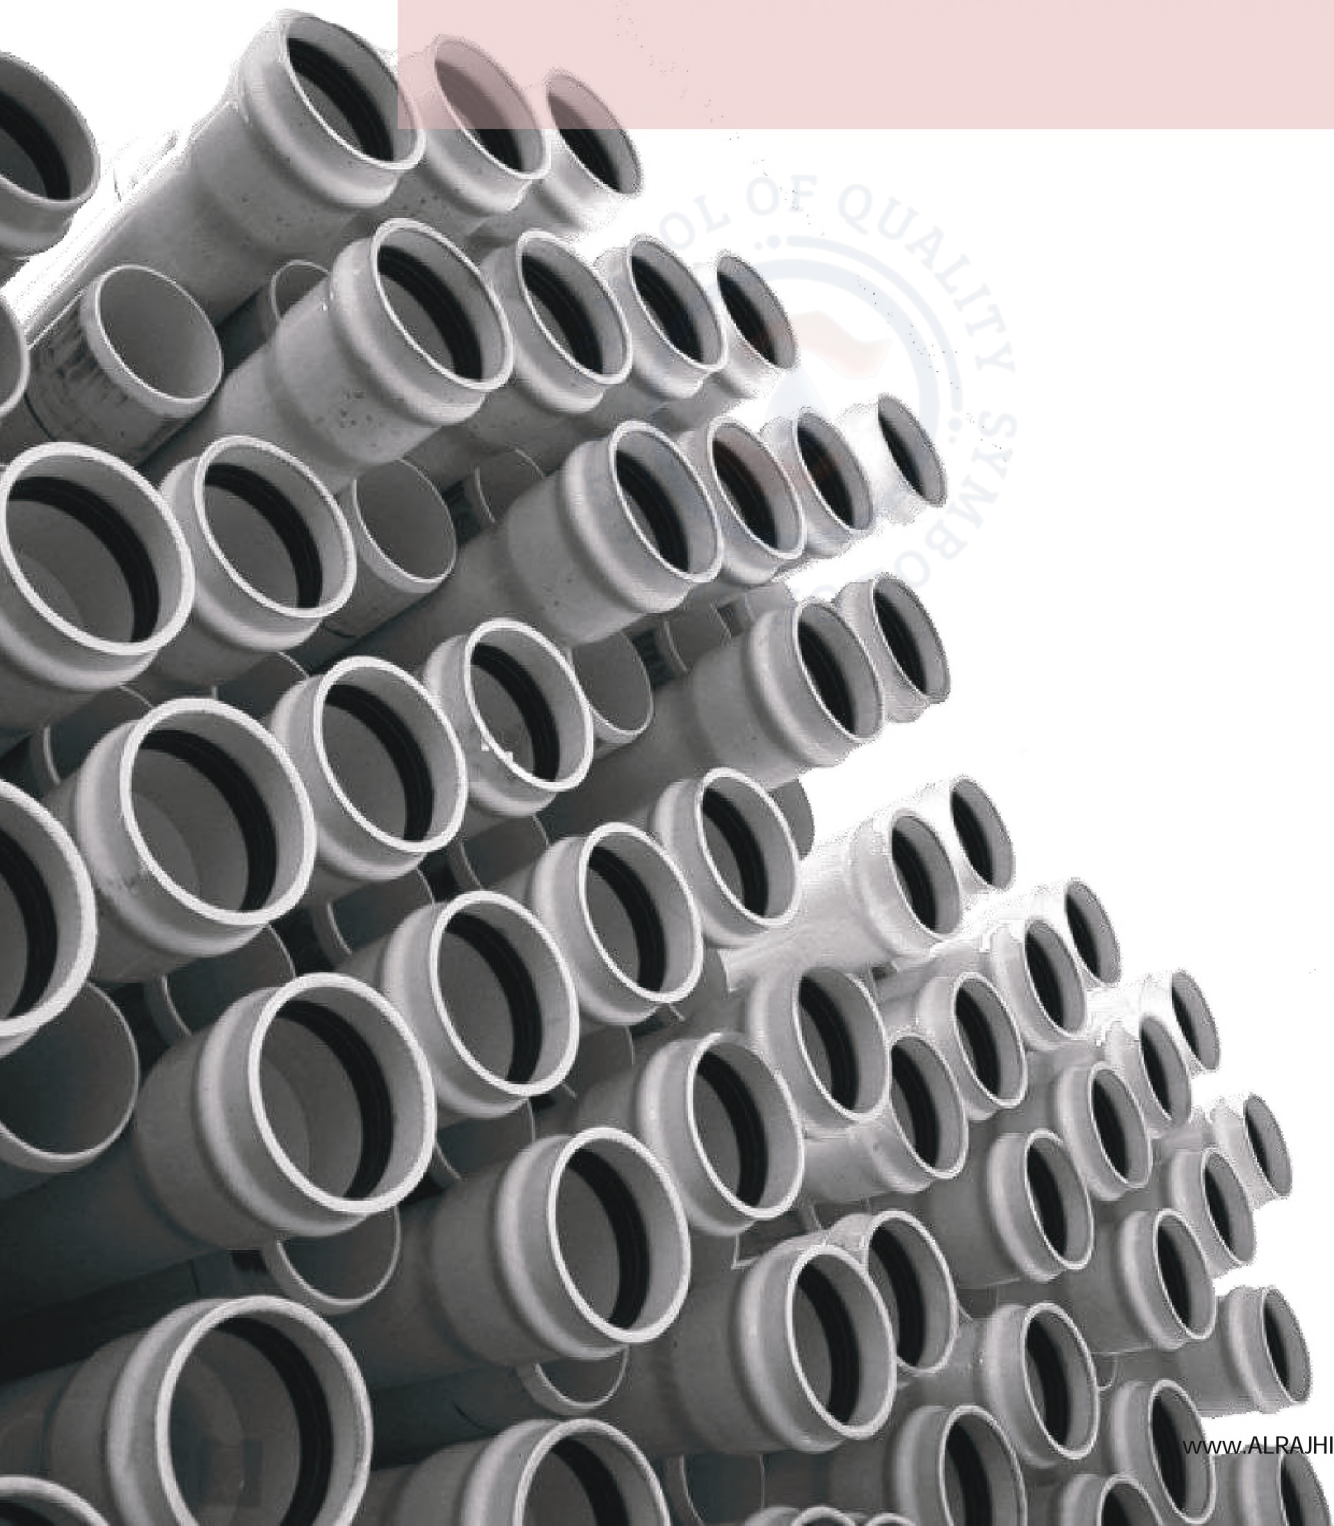



PVC pipes according to (SASO 14, DIN 8062, DIN 19532, ISO 161)

Class		Class 1		Class 2		Class 3		Class 4		Class 5	
Nominal Pressure in Bars		2 BAR		4 BAR		6 BAR		10 BAR		16 BAR	
Nom-OD mm	Tolerance on Nom-OD mm	Nom-thick of wall mm	Nom-wt. kg/m	Nom thick of wall mm	Nom-wt. kg/m	Nom-thick of wall mm	Nom-wt. kg/m	Nom-thick wall mm	Nom-wt. kg/m	Nom-thick of wall mm	Nom-wt. kg/m
20	+0.2									1.5	0.137
25	+0.2							1.5	0.174	1.9	0.212
32	+0.2							1.8	0.264	2.4	0.342
40	+0.2					1.8	0.334	1.9	0.350	3.0	0.525
50	+0.2					1.8	0.422	2.4	0.552	3.7	0.809
63	+0.2					1.9	0.562	3.0	0.854	4.7	1.29
75	+0.3			1.8	0.642	2.2	0.782	3.6	1.22	5.6	1.82
90	+0.3			1.8	0.774	2.7	1.13	4.3	1.75	6.7	2.61
110	+0.3	1.8	0.950	2.2	1.16	3.2	1.64	5.3	2.61	8.2	3.90
125	+0.3	1.8	1.08	2.5	1.48	3.7	2.13	6.0	3.64	9.3	5.01
140	+0.4	1.8	1.21	2.8	1.84	4.1	2.65	6.7	4.18	10.4	6.27
160	+0.4	1.8	1.39	3.2	2.41	4.7	3.44	7.7	5.47	11.9	8.17
180	+0.4	1.8	1.57	3.6	3.02	5.3	4.37	8.6	6.88	13.4	10.4
200	+0.4	1.8	1.74	4.0	3.70	5.9	5.37	9.6	8.51	14.9	12.8
225	+0.5	1.8	1.96	4.5	4.70	6.6	6.76	10.8	10.8	16.7	16.1
250	+0.5	2.0	2.40	4.9	5.65	7.3	8.31	11.9	13.2	18.6	19.9
280	+0.6	2.3	3.11	5.5	7.11	8.2	10.4	13.4	16.6	20.8	24.9
315	+0.6	2.5	3.78	6.2	9.02	9.2	13.2	15.0	20.9	23.4	31.5
355	+0.7	2.9	4.88	7.0	11.4	10.4	16.7	16.9	26.5	26.3	39.9
400	+0.7	3.2	6.10	7.9	14.5	11.7	21.1	19.1	33.7	29.7	50.8
450	+0.8	3.6	7.65	8.9	18.3	13.2	26.8	21.5	42.7	33.1	
500	+0.9	4.0	9.38	9.8	22.4	14.6	32.9	23.9	52.6	36.8	
560	+1.0	4.2	11.8	11.0	28.1	16.4	41.4	26.7	65.8		
630	+1.1	2.5	14.7	12.4	35.7	18.4	52.2	30.0	83.2		
710	+1.2	5.7	18.9	14.0	45.3	20.7	66.1				
800	+1.3	6.4	23.9	15.7	57.2	23.3	83.9				

Length : 6 meters (Other lengths are available on request.)  
 Colour : Grey.  
 Socket Type Rubber joint (R/J) type supplied from sizes 63mm up to 800mm.  
 Solvent Cement (SC/J) type supplied from sizes 20mm up to 800mm.

Country Standard



## PVC Pipes According to ASTM D - 1785, Schedule 40 &amp; Schedule 80

Nominal Size Inch.	O.D. (mm)		Schedule 40				Schedule 80			
	min	max	Wall Thickness (mm)		Nominal Weight (kg/m)	PSI	Wall Thickness (mm)		Nominal Weight (kg/m)	PSI
			min	max			min	max		
1/2	21.24	21.44	2.77	3.28	0.24	600	3.73	4.24	0.3	850
3/4	26.57	26.77	2.87	3.38	0.33	480	3.91	4.42	0.43	690
1	33.27	33.53	3.38	3.89	0.48	450	4.55	5.08	0.61	630
1 1/4	42.03	42.29	3.56	4.07	0.65	370	4.85	5.44	0.87	520
1 1/2	48.11	48.41	3.68	4.19	0.77	330	5.08	5.69	1.03	470
2	60.17	60.47	3.91	4.42	1.04	280	5.54	6.2	1.43	400
2 1/2	72.84	73.2	5.16	5.77	1.57	300	7.01	7.85	2.2	420
3	88.7	89.1	5.49	6.15	2.14	260	7.62	8.53	2.91	370
4	114.1	114.5	6.02	6.73	3.05	220	8.56	9.58	4.26	320
5	141.05	141.55	6.22	7.347	4.18	190	9.52	10.67	6.42	290
6	168	168.56	7.11	7.98	5.37	180	10.97	12.29	8.13	280
8	218.7	219.46	8.18	9.17	8.11	160	12.7	14.22	12.4	250

**Length** : 6 meters (Other lengths are available on request.)

**Colour** : Schedule 40- White, Schedule 80 - Grey

**Socket Type** Plain, solvent cement (SC/J)

Country Standard 

## PVC Pressure-rated Pipes According to ASTM D 2241

Nominal Size Inch.	O.D. (mm)		Wall Thickness (mm)											
	min	max	Standard Diameter Ratio (SDR)											
			41 W.P: 6.9 Bar		32.5 W.P: 8.6 Bar		26 W.P: 11 Bar		21 W.P: 13.8 Bar		17 W.P: 17.2 Bar		13.5 W.P: 21.7 Bar	
		min	max	min	max	min	max	min	max	min	max	min	max	
1/2	21.24	21.44											1.57	2.08
3/4	26.57	26.77						1.52	2.03	1.57	2.08	1.98	2.49	
1	33.27	33.53					1.52	2.03	1.60	2.11	1.96	2.46	2.46	2.97
1 1/4	42.03	42.29			1.52	2.03	1.63	2.13	2.01	2.52	2.49	3.00	3.12	3.63
1 1/2	48.11	48.41			1.52	2.03	1.85	2.36	2.29	2.80	2.84	3.35	3.58	4.09
2	60.17	60.47			1.85	2.36	2.31	2.82	2.87	3.38	3.56	4.06	4.47	4.98
3	88.70	89.10	2.16	2.67	2.74	3.25	3.43	3.94	4.24	4.75	5.23	5.87	6.58	7.37
4	114.07	114.53	2.80	3.30	3.51	4.01	4.39	4.90	5.44	6.10	6.73	7.54	8.46	9.47
6	168.00	168.56	4.11	4.62	5.18	5.79	6.48	7.26	8.03	9.00	9.91	11.10	12.47	13.97
8	218.70	219.46	5.33	5.97	6.73	7.54	8.43	9.45	10.41	11.66	12.90	14.45		

Note: The maximum pressure rating given above is based on water at 73 °F/23 °C and for unthreaded pipes.

**Length** : 6 meters (Other lengths are available on request.)

**Colour** : White

**Socket Type**: Plain, solvent cement (SC/J).

Country Standard 



### PVC Pipes According to BS 3505 / 3506

Applications: Water supply, irrigation systems, industrial use.

Nominal Size Inch.	O.D. (mm)		Wall Thickness (mm)													
	min	max	Class B		Class C		Class D		Class E		Class O		Class 6		Class 7	
			min	max	min	max	min	max	min	max	min	max	min	max	min	max
3/8	17.0	17.3							1.5	1.9			2.3	2.8	3.2	3.8
1/2	21.2	21.5							1.7	2.1			2.8	3.3	3.7	4.3
3/4	26.6	26.9							1.9	2.5			2.9	3.4	3.9	4.5
1	33.4	33.7							2.2	2.7			3.4	4.0	4.5	5.2
1 1/4	42.1	42.4					2.2	2.7	2.7	3.2			3.6	4.2	4.8	5.5
1 1/2	48.1	48.4					2.5	3.0	3.1	3.7	1.8	2.2	3.7	4.3	5.1	5.9
2	60.2	60.5			2.5	3.0	3.1	3.7	3.9	4.5	1.8	2.2			5.5	6.3
2 1/2	75.0	75.3			3.0	3.5	3.9	4.5	4.8	5.5	1.8	2.2				
3	88.7	89.1	2.9	3.4	3.5	4.1	4.6	5.3	5.7	6.6	1.8	2.2				
4	114.1	114.5	3.4	4.0	4.5	5.2	6.0	6.9	7.3	8.4	2.3	2.8				
5	140.0	140.4	3.8	4.4	5.5	6.4	7.3	8.4	9.0	10.4	2.6	3.1				
6	168.0	168.5	4.5	5.2	6.6	7.6	8.8	10.2	10.8	12.5	3.1	3.7				
8	218.8	219.4	5.3	6.1	7.8	9.0	10.3	11.9	12.6	14.5	3.1	3.7				

Note: Classes B,C,D and E are to BS 3505/3506. Classes O, 6 and 7 are to BS 3506 / 1969. Classes 6 and 7 equivalent to ASTM D-1785, SCH 40 and SCH 80 respectively.

**Length** : 6 meters (Other lengths are available on request.)  
**Colour** : Dark Grey except class O which is grey.  
**Socket Type** Plain, solvent cement (SC/J)


Country Standard 

### Pressure ratings for working pressure at 20 °C

#### Class

**B** 6.0 bar  
**C** 9.0 bar  
**D** 12.0 bar  
**E** 15.0 bar

**For higher working temperatures, the pressure rating should be reduced.**



**AL-RAJHI**

الراجحي

## **C-PVC PIPES**

**FOR HOT AND COLD WATER**

**Manufacturing Standards**



**ASTM F441**

American Society for Testing & Material



**DIN 8079**

German Standard

## GENERAL PROPERTIES

### MATERIAL

Chlorinated Polyvinyl Chloride (CPVC)

### GENERAL PROPERTIES

- |                     |                             |
|---------------------|-----------------------------|
| a. Specific Gravity | 1.56 gm/cm <sup>3</sup>     |
| b. Water Absorption | 7 gm/cm <sup>2</sup>        |
| c. Flammability     | will not support combustion |

### THERMAL PROPERTIES

- |                                    |                           |
|------------------------------------|---------------------------|
| a. Softening Point                 | 93°C                      |
| b. Coefficient of Linear Expansion | 5.3 x 10 <sup>-5</sup> °C |

### MECHANICAL PROPERTIES

- |                              |                          |
|------------------------------|--------------------------|
| a. Ultimate Tensile Strength | 575 kgf/cm <sup>2</sup>  |
| b. Flexural Strength         | 1018 kgf/cm <sup>2</sup> |
| c. Impact Strength           | 11 joules                |

### ELECTRICAL PROPERTIES

- |                                  |                         |
|----------------------------------|-------------------------|
| a. Volume Resistivity            | 10 <sup>14</sup> ohm/cm |
| b. Surface Resistivity           | 10 <sup>12</sup> ohm/cm |
| c. Power Factor ( at 10 cycles ) | 3.0                     |

CPVC is a non-conductor of electricity and also non-subject to galvanic or electrolytic attack. Electrical equipments should not be earthened to ( CPVC ) pipes.

COLOUR

Dusty Grey and Light Ivory





Al-Rajhi Pipes is a leading supplier of CPVC pipes and fittings in the Gulf region, offering a comprehensive range of sizes that comply with the ASTM F441 and DIN 8079 standards. With a strong commitment to quality and excellence, Al-Rajhi Pipes provides reliable CPVC piping solutions for various applications. In addition to their wide selection of pipes, they also supply high-quality CPVC fittings, ensuring a complete and integrated piping system. With their dedication to customer satisfaction and extensive distribution network, Al-Rajhi Pipes is the trusted source for CPVC pipes and fittings across the Gulf region.

## What is cPVC?

Chlorinated Polyvinyl Chloride (CPVC) is chlorinated Pvc and has become an important engineering thermoplastic due to its relatively low cost, high heat distortion temperature, chemical inertness, and outstanding mechanical, dielectric, flame and smoke properties.

CPVC supplied by AL-RAJHI. A full range of CPVC pipes are produced according to American Standards (ASTM F441) and Metric Standards (DIN 8079 / 8080).


### Benefits of CPVC

CPVC is the most superior plastic alternative to Polypropylene, PEX, Polyethylene and other plastic and much more superior to metal alternatives with respect to.

- Heat resistance up to 90°C
- Chemical resistance over a broad temperature range
- Long term proven service performance of more than 50 years
- Lower installed cost
- Suitable for potable water and can be produced with NSF or WRAS approved grade
- Does not sustain burning.

### CPVC advantage over Polypropylene

- Same flow rate with smaller pipe size
- Ease of installation (overhead lines, confined spaces)
- No need for expensive electrical tools and source
- Lower thermal expansion
- Wider support spacing, less "looping" of pipe
- Less heat loss
- Chemical resistance to acids and alkalis
- Low bacteria build up
- No oxygen permeation to corrode metal components
- Low flame spread
- Low smoke generation
- Self-extinguishing
- No flaming drips.



**CPVC**  
- initially when torch is applied



**Other Plastics**  
- initially when torch is applied



**CPVC**  
- After torch is removed




**Other Plastics**  
- After torch is removed

## CPVC pipe length variation due to temperature change (°C)

Temperature Change (°C)	Length Variation mm/meter
5	0.35
10	0.7
15	1.05
20	1.4
25	1.75
30	2.1
35	2.45
40	2.8
45	3.15
50	3.5
55	3.85
60	4.2

Coefficient of thermal expansion = 0.07 mm/m/°C

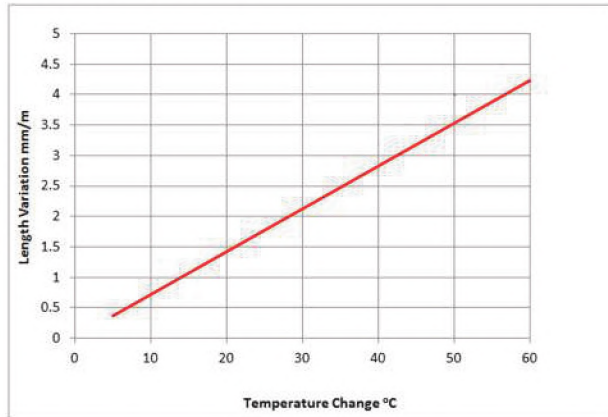

## CPVC pipes according to ASTM F 441

Nominal Size inch	Outside diameter (mm)		Schedule 80 Minimum Wall Thickness		Normal Weight kg/m	Water Pressure Rating	
	Inch	mm	Inch	mm		Psi	Bar
1/4	0.540	13.7	0.119	3.02	0.230	1130	77.8
1/2	0.840	21.34	0.147	3.73	0.337	850	58.6
3/4	1.050	26.67	0.154	3.91	0.457	690	47.6
1	1.315	33.40	0.179	4.55	0.671	630	43.4
1 1/4	1.660	42.20	0.191	4.85	0.928	520	35.9
1 1/2	1.900	48.30	0.200	5.08	1.13	470	32.4
2	2.5375	60.33	0.218	5.54	1.56	400	27.6
3	3.500	88.9	0.300	7.62	2.9	370	25.5
4	4.500	114.3	0.337	9.52	4.3	320	22.1
6	6.625	168.3	0.432	10.97	8.1	280	19.3

pressure rating applies for Water at 23 °C and for unthreaded pipes

## CPVC Pipes according to DIN 8079


Nominal Size mm	Pressure Rating at 20 °C					
	PN16		PN20		PN25	
	Wall Thickness (mm)	Weight kg/m	Wall Thickness (mm)	Weight kg/m	Wall Thickness (mm)	Weight kg/m
16	1.2	0.100	1.5	0.118	1.8	0.136
20	1.5	0.151	1.9	0.183	2.3	0.217
25	1.9	0.234	2.3	0.379	2.8	0.326
32	2.4	0.379	3.0	0.455	3.6	0.534
40	3.0	0.582	3.7	0.701	4.5	0.830
50	3.7	0.896	4.6	1.090	5.6	1.290
63	4.7	1.430	5.8	1.720	7.0	2.020
75	5.6	2.020	6.9	2.420	8.4	2.880
90	6.7	2.880	8.2	3.460	10.0	4.100
110	8.2	4.310	10.0	5.130	12.3	6.160

Length: 5.8 and 6 meters | Colour: Beige  
 Socket Type: Plain \*Non standard lengths and colour are available on request.



الراجحي AL-RAJHI

# PPR PIPES

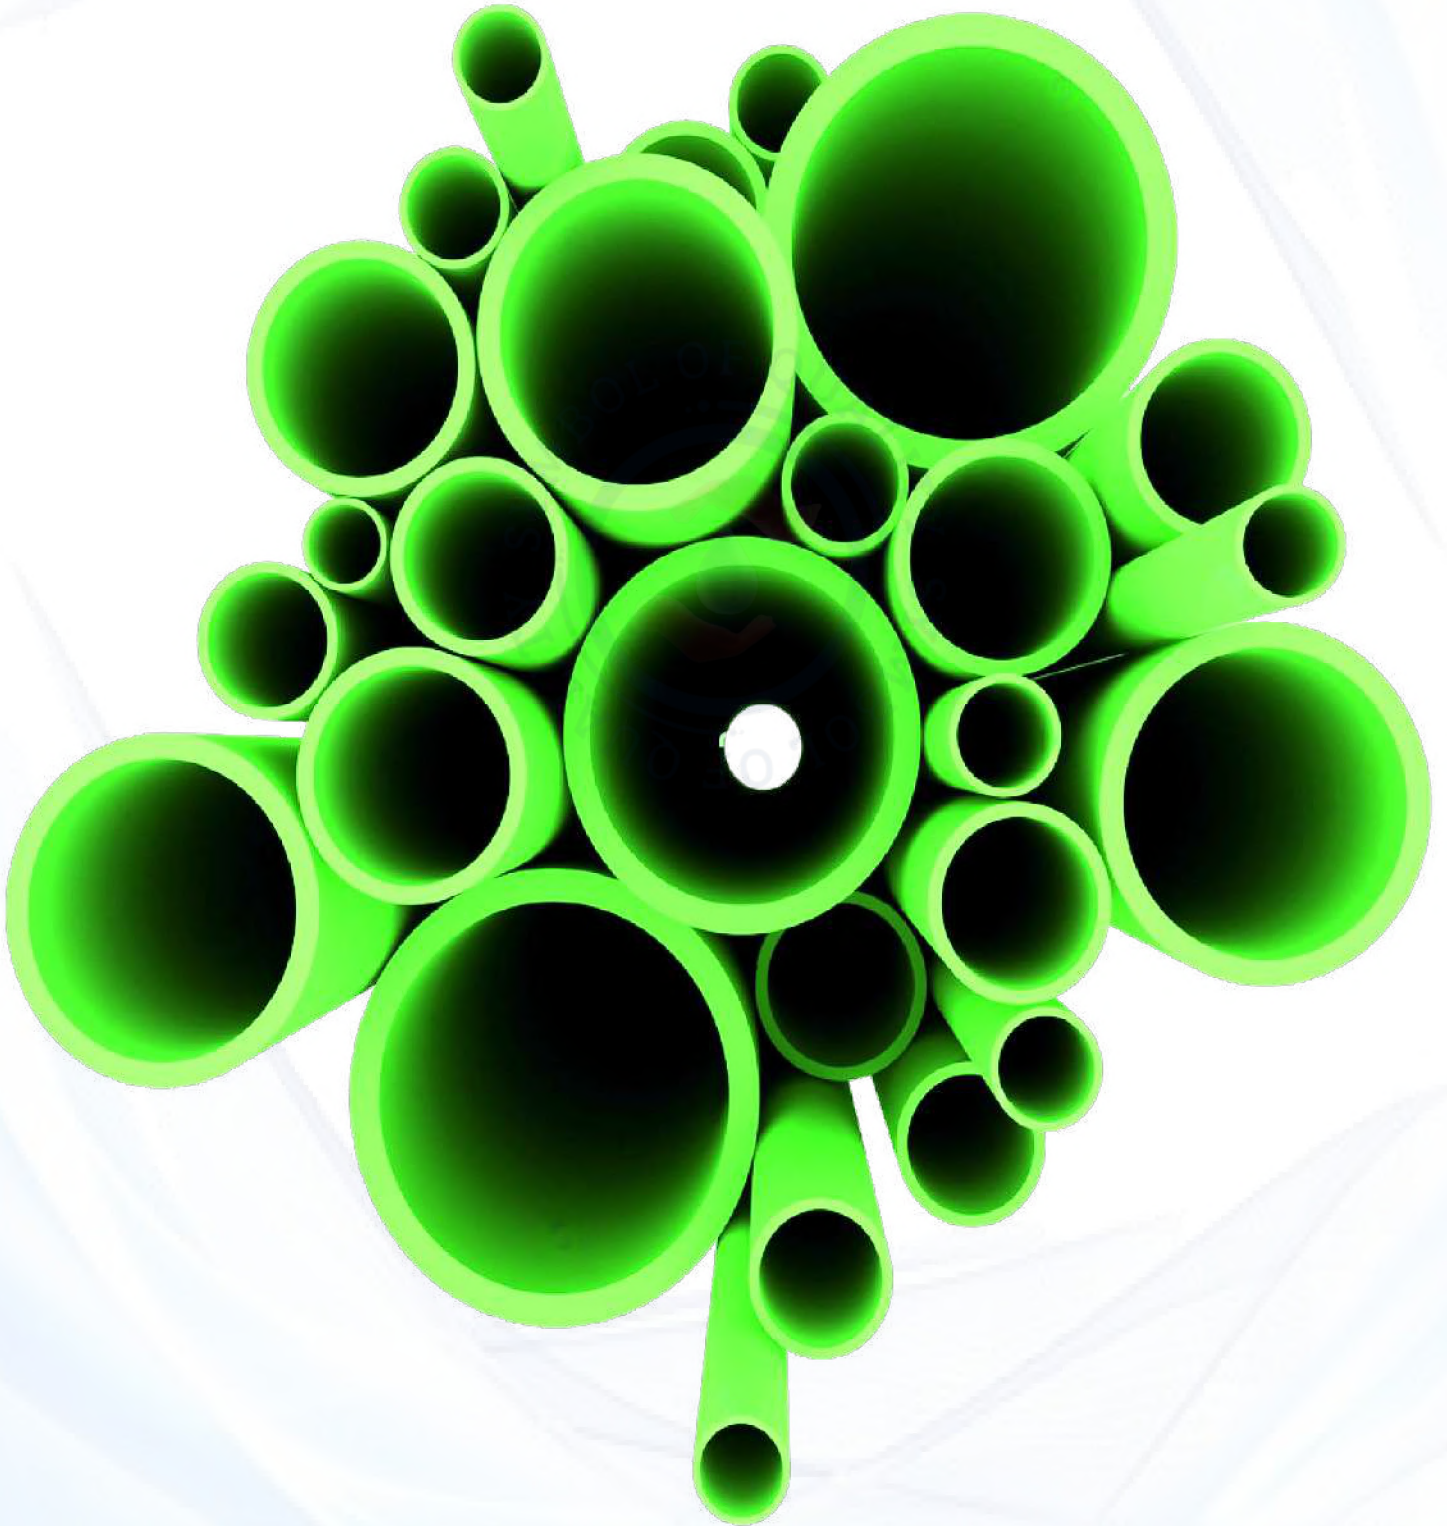

## PPR GENERAL PROPERTIES


### Mechanical & Thermal Properties of PPR

Properties	Unit	Value	Test Method
Density	g/cm <sup>3</sup>	0.90	ISO 1183
Melt Flow Index 230°C/2.16kg	g/10min	0.20 -0.45	ISO 1133
Flexural modulus (2mm/min)@23deg.	MPa	800	ISO 178
Tensile Modulus (1mm/min)	MPa	850	ISO 527
Tensile strain at Yield (50mm/min)	%	13.50	ISO 527 -2
Tensile stress at Yield (50mm/min)	MPa	25	ISO 527 -2
Thermal conductivity (10-60deg.)	W/m.K	0.24	DIN 52612
Coefficient of Thermal Expansion(0deg- 110deg)	m/Mk	1.5-1.8x10 <sup>-4</sup>	DIN 53752
VICAT softening Temperature (VST/A/50)	°C	130	ISO 306
VICAT softening Temperature (VST/B/50)	°C	69	ISO 306

PPR PIPES: DIN 8077 / 8078


Nominal Size (mm)	Outside Diameter (mm)		WALL THICKNESS (S) (MM)	
			Pipe Series 2.5	
	MIN.	MAX.	MIN.	MAX.
20	20.0	20.3	3.40	4.00
25	25.0	25.3	4.20	4.90
32	32.0	32.3	5.40	6.20
40	40.0	40.4	6.70	7.60
50	50.0	50.5	8.30	9.40
63	63.0	63.6	10.50	11.80
75	75.0	75.7	12.50	14.00
90	90.0	90.9	15.00	16.80
110	110.0	110.9	18.30	20.40



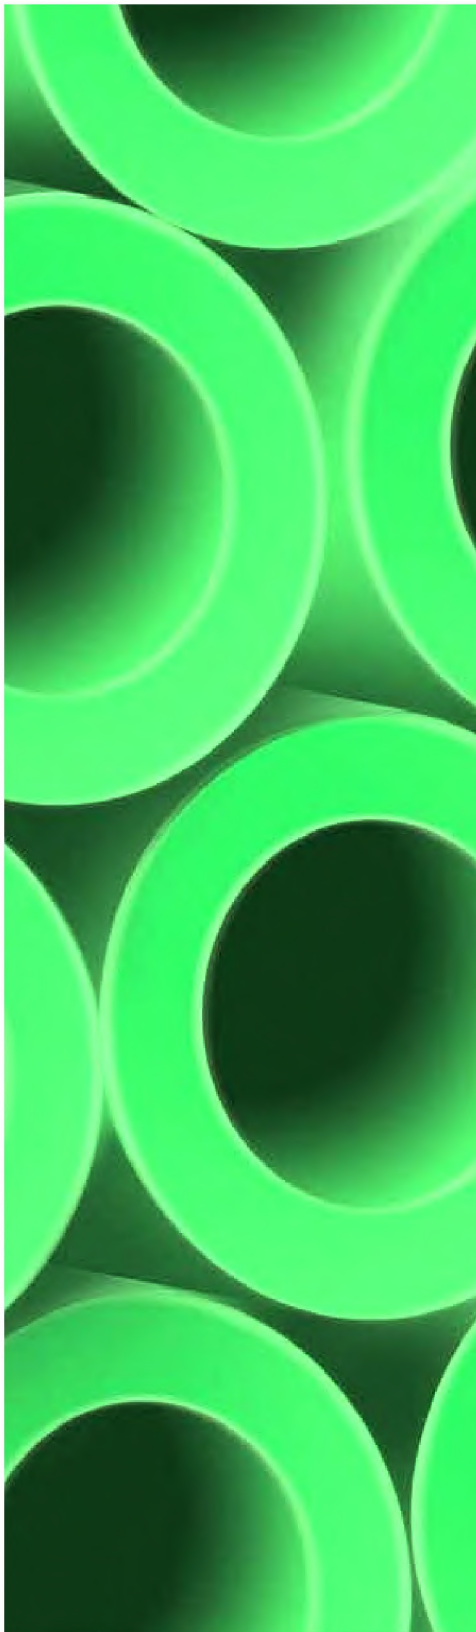


**Al-Rajhi PPR - PIPES**

**Nominal pressure** - Class 2/8 bar  
**Std : dimension ratio** - 6  
**Std : Reference KTP** SASO-ISO  
**standard colour** 15874  
**Green**




PIPE SIZE	OUTSIDE DIAMETER (D) mm	WALL THICKNESS (S) mm	INTERNAL DIAMETER (d) mm	WEIGHT Kg/m
20 mm	20.0	3.40-4.00	13.20	0.172
25 mm	25.0	4.20-4.90	16.60	0.266
32 mm	32.0	5.40-6.20	21.20	0.434
40 mm	40.0	6.70-7.60	26.60	0.671
50 mm	50.0	8.30-9.40	33.40	1.040
53 mm	63.0	10.50-11.80	42.00	1.650
75 mm	75.0	12.50-14.00	50.00	2.340
90 mm	90.0	15.00-16.70	60.00	3.360
110 mm	110.0	18.30-20.40	73.40	5.010
125 mm	125.0	20.80-23.10	83.40	6.470
160 mm	160.0	26.60-29.40	106.70	10.60




**AL-RAJHI PPR - Black Pipes**


ISO 15874




PIPE SIZE	NOMINAL DIAMETER (D) in mm	OUTER DIAMETER (dg) in mm	INTERNAL DIAMETER (d) in mm	NOMINAL THICKNESS (S) in mm	TOTAL THICKNESS (Sg) in mm
Ø 20	20.00	21.80	13.20	3.40-4.00	4.30-4.90
Ø 25	25.00	27.00	16.60	4.20-4.90	5.20-5.90
Ø 32	32.00	34.00	21.20	5.40-6.20	6.40-7.20
Ø 40	40.00	42.20	26.60	6.70-7.60	7.80-8.70
Ø 50	50.00	52.20	33.40	8.30-9.40	9.40-10.50
Ø 63	63.00	65.40	42.00	10.50-11.80	11.70-13.00



**PPR - FG Pipe**  
DIN 8077/8078 DIN 53769




PIPE SIZE	NOMINAL DIAMETER (D) in mm	INTERNAL DIAMETER (d) in mm	NOMINAL THICKNESS (S) in mm	FG THICKNESS (Sg) in mm
Ø 20	<b>20.00</b>	<b>13.20</b>	<b>3.40-4.00</b>	<b>1.33</b>
Ø 25	<b>25.00</b>	<b>16.60</b>	<b>4.20-4.90</b>	<b>1.40</b>
Ø 32	<b>32.00</b>	<b>21.20</b>	<b>5.40-6.20</b>	<b>1.80</b>
Ø 40	<b>40.00</b>	<b>26.60</b>	<b>6.70-7.60</b>	<b>2.23</b>
Ø 50	<b>50.00</b>	<b>33.40</b>	<b>8.30-9.40</b>	<b>2.76</b>
Ø 63	<b>63.00</b>	<b>42.00</b>	<b>10.50-11.80</b>	<b>2.43</b>



**PPR - PE PIPE**  
DIN 8077/8078, ISO 15874




PIPE SIZE	NOMINAL DIAMETER (D) in mm	OUTER DIAMETER (Dg) in mm	INTERNAL DIAMETER (d) in mm	NOMINAL THICKNESS (S) in mm	TOTAL THICKNESS (Sg) in mm
Ø 20	<b>20.00</b>	<b>21.80</b>	<b>13.20</b>	<b>3.40-4.00</b>	<b>4.30-4.90</b>
Ø 25	<b>25.00</b>	<b>27.00</b>	<b>16.60</b>	<b>4.20-4.90</b>	<b>5.20-5.90</b>
Ø 32	<b>32.00</b>	<b>34.00</b>	<b>21.20</b>	<b>5.40-6.20</b>	<b>6.40-7.20</b>
Ø 40	<b>40.00</b>	<b>42.20</b>	<b>26.60</b>	<b>6.70-7.60</b>	<b>7.80-8.70</b>
Ø 50	<b>50.00</b>	<b>52.20</b>	<b>33.40</b>	<b>8.30-9.40</b>	<b>9.40-10.50</b>
Ø 63	<b>63.00</b>	<b>65.40</b>	<b>42.00</b>	<b>10.50-11.80</b>	<b>11.70-13.00</b>
Ø 75	<b>75.00</b>	<b>77.40</b>	<b>50.00</b>	<b>12.50-14.00</b>	<b>13.70-15.50</b>
Ø 90	<b>90.00</b>	<b>93.00</b>	<b>60.00</b>	<b>15.00-16.80</b>	<b>16.50-18.30</b>
Ø 110	<b>110.00</b>	<b>113.60</b>	<b>73.40</b>	<b>18.30-20.40</b>	<b>20.20-22.00</b>



**FG- PPR - PE PIPE**  
DIN 8077/8078, DIN 53769



PIPE		DIAMETER	WALL THICKNESS	INTERNAL DIAMETER	TOTAL DIAMETER	TOTAL WALL THICKNESS	WEIGHT	
Dimension	Packing (Pcs./Pack)	d	s	d1	dg	sg	kg/m	kg/4m
		mm	mm	mm	mm	mm		
20mm	<b>25</b>	<b>20.00</b>	<b>3.40</b>	<b>13.20</b>	<b>20.44</b>	<b>3.62</b>	<b>0.195</b>	<b>0.779</b>
25mm	<b>20</b>	<b>25.00</b>	<b>4.20</b>	<b>16.60</b>	<b>25.56</b>	<b>4.48</b>	<b>0.307</b>	<b>1.226</b>
32mm	<b>10</b>	<b>32.00</b>	<b>5.40</b>	<b>21.20</b>	<b>32.48</b>	<b>5.64</b>	<b>0.483</b>	<b>1.932</b>
40mm	<b>8</b>	<b>40.00</b>	<b>6.70</b>	<b>26.60</b>	<b>40.56</b>	<b>6.98</b>	<b>0.762</b>	<b>3.046</b>
50mm	<b>5</b>	<b>50.00</b>	<b>8.30</b>	<b>33.40</b>	<b>50.48</b>	<b>8.54</b>	<b>1.232</b>	<b>4.927</b>
63mm	<b>3</b>	<b>63.00</b>	<b>10.50</b>	<b>42.00</b>	<b>63.48</b>	<b>10.74</b>	<b>1.830</b>	<b>7.320</b>

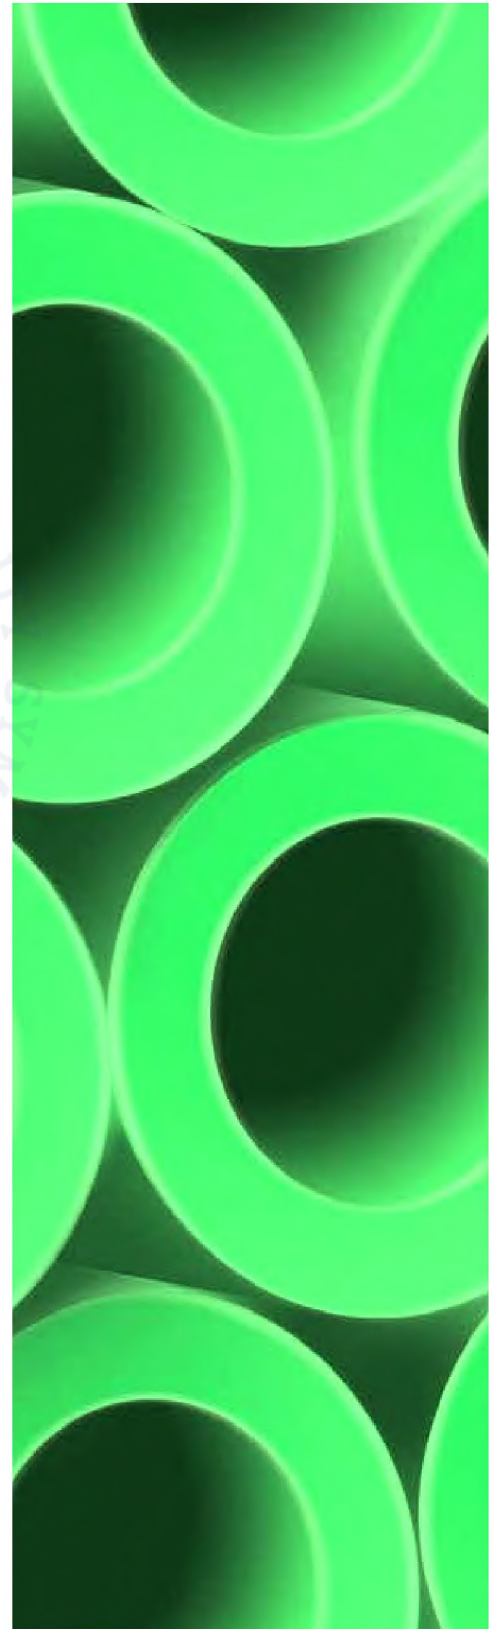




**PVC FABRICATED PRODUCTS**


AL-Rajhi is premium supplier all kinds of long bend and repair coupling fittings which are required in the project during installation. All these fittings are combined with AL-Rajhi Pipes under Standards DIN 8062/8061 and it is available with single and double rubber joint at the end. Also available for all kind of pressure rating 6-10 and 16 bar.

**Repair Coupling:**

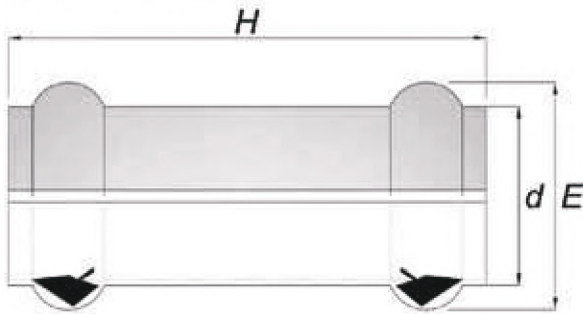


d mm	E mm	H mm
63	86	280
75	102	280
90	120	290
110	144	290
160	202	350
200	248	440
225	277	400
250	304	440
280	342	440
315	382	440

**Register Coupling:**

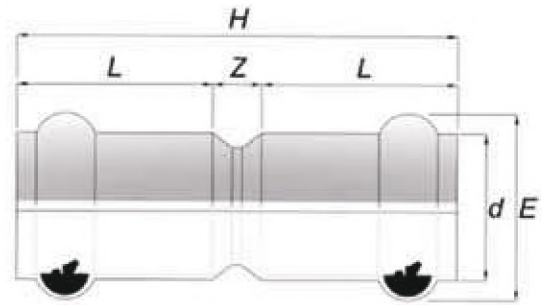


d mm	E mm	H mm	L mm	Z mm
63	86	280	128	30
75	102	280	123	30
90	120	290	133	30
110	144	310	135	35
125	161	330	143	35
140	178	350	158	40
160	202	350	155	40
180	224	380	173	50
200	248	410	185	50
225	277	460	195	55
250	304	460	223	55
280	342	490	220	60
315	382	500	220	60




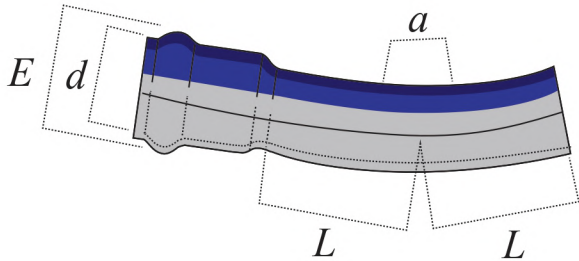

22° 30' Long Bend			
d mm	L mm	angle	E mm
63	235	22° 1/2	86
75	260	22° 1/2	102
90	292	22° 1/2	120
110	384	22° 1/2	144
125	413	22° 1/2	161
140	430	22° 1/2	178
160	464	22° 1/2	202
180	535	22° 1/2	224
200	530	22° 1/2	240

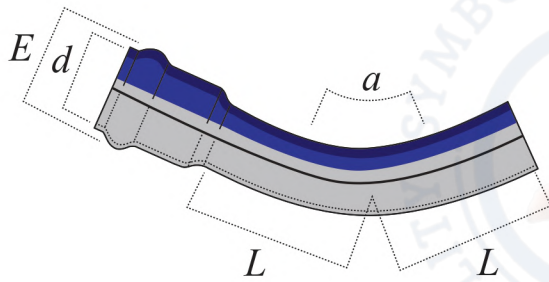

45° Long Bend			
d mm	L mm	angle	E mm
63	235	45°	86
75	260	45°	102
90	292	45°	120
110	384	45°	144
125	413	45°	161
140	430	45°	178
160	464	45°	202
180	810	45°	224
200	805	45°	240

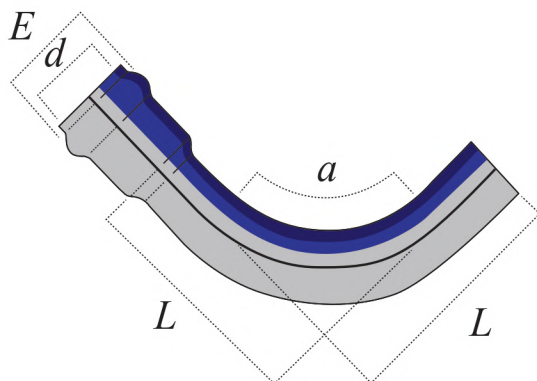

90° Long Bend			
d mm	L mm	angle	E mm
63	377	90°	86
75	401	90°	102
90	462	90°	120
110	504	90°	144
125	533	90°	161
140	595	90°	178
160	614	90°	202
180	1010	90°	224
200	1155	90°	240





الراجحي AL-RAJHI

# FITTINGS



## UPVC FITTINGS PROPERTIES

### SCHEDULE 40 & 80

PROPERTY	VALUE	REFERENCE
Specific Gravity $\pm$ 0.02	1.44	ASTM D-792
Tensile Strength psi @ 73°F.	7100	ASTM D-638
Modulus of Elasticity in tension, psi @ 73°F.	4,000,000	ASTM D-638
Flexural Strength (psi)	12000-14000	ASTM D-790
Izod Impact, Ft. lbs/in, Notch @ 73°F.	0.65	ASTM D-256
Heat Deflection °F @ 264 psi	160	ASTM D-648
Heat Resistance Deg. F.	140	
Thermal Conductivity, BTU/hr/sq.ft/Deg. F/in	1.2	ASTM D-177
Co-efficient of Expansion, in/in, Deg. Fx10 <sup>-5</sup>	3	ASTM D-696
Water Absorption, % 24hrs @ 73°F	0.05	ASTM D-570
Cell Classification	12454B	ASTM D-1784
Colour Code	White (Sch. 40) Dark Grey (Sch. 80)	

#### Jointing

Socket type jointing. For solvent cement use.

#### Operating Temperature

Maximum service temperature for UPVC schedule 40 and UPVC schedule 80 fittings is 140 Deg. F

Maximum service temperature for CPVC schedule 80 fittings is 210 Deg. F.

#### Chemical Properties

UPVC and CPVC fittings are resistant to corrosion by ground water, weathering and many chemicals. Further information on chemical resistance is available on request.



## CPVC FITTINGS PROPERTIES

### SCHEDULE 80

PROPERTY	TEST CONDITION	VALUE	REFERENCE
Specific Gravity	73 °F	1.55	ASTM D-792
Rockwell Hardness	73 °F	117	ASTM D-785
Heat Deflection @ 264 psi	73 °F	214	ASTM D-748
Tensile Strength (psi)	73 °F	8200	ASTM D-738
Tensile Modulus (psi)	73 °F	430.000	ASTM D-738
Flexural Strength (psi)	73 °F	15.000	ASTM D-790
Flexural Modulus (psi)	73 °F	438.000	ASTM D-790
Izod Impact, Ft. lbs/In. Notch	73 °F	1.6	ASTM D-756
Water Absorption (24 hrs)	73 °F	0.07+	ASTM D-570
Coefficient of Expansion ( F ), in./in. x 10 <sup>-5</sup>		3.7	ASTM D-696
Flammability	.062"	V-0	UL-94
Cell Designation		23557B	ASTM D-1784

#### Jointing

Socket type jointing. For solvent cement use.

#### Operating Temperature

Maximum service temperature for UPVC schedule 40 and UPVC schedule 80 fittings is 140 Deg. F

Maximum service temperature for CPVC schedule 80 fittings is 210 Deg. F.

#### Chemical Properties

UPVC and CPVC fittings are resistant to corrosion by ground water, weathering and many chemicals. Further information on chemical resistance is available on request.

## PRESSURE RATINGS

Water pressure rating (max) for UPVC schedule 40 fittings at 73 Deg. F.

PIPE SIZE inch	SOCKET FITTINGS (psi)
1/2	600
3/4	480
1	450
1 1/4	370
1 1/2	330
2	280
3	260
4	220
6	180

Water pressure rating (max) for UPVC schedule 80 fittings at 73 Deg. F.

PIPE SIZE inch	SOCKET FITTINGS (psi)
1/2	850
3/4	690
1	630
1 1/4	520
1 1/2	470
2	400

Water pressure rating (max) for CPVC schedule 80 fittings at 73 Deg. F.

PIPE SIZE inch	SOCKET FITTINGS (psi)	THREADED FITTINGS (psi)
1/2	850	420
3/4	690	340
1	630	320
1 1/4	520	260
1 1/2	470	240
2	400	200

### ELBOW PVC



Dimensions mm					KG/PCS
D	H	W	L	A°	
50 mm	92.5	61	28.00	90°	0.111
75 mm	130	88	41.00	87.5°	0.254
110 mm	178	126	51.00	87.5°	0.655
160 mm	252	180	71.00	87.5°	1.465



BS / EN STANDARD

**BSEN 1329 / 1401**

**ELBOW 45°**



Nominal Pipe Size inch	C mm	C1 mm	M mm
1 1/2 (43mm)	37.4	28	48
2 (56mm)	42.7	31	61.2
3 (82mm)	76.7	45	94
4 (110mm)	75.7	50.5	119.5
6 (160mm)	122.3	77.5	172

**TEE 90°**



Nominal Pipe Size inch	C mm	C1 mm	M mm
1 1/2	45.12	22.4	50
2 (56mm)	71.5	31	61.2
3 (82mm)	106.1	45	94
4 (110mm)	131.9	50.5	119.5
6 (160mm)	191.4	77.5	172

**WYE 45°**



Nominal Pipe Size inch	C mm	C1 mm	D mm	E mm
4 (110 mm)	264	119.5	186.5	136
6 (160 mm)	395	172	272.1	194.6



**REDUCING  
BUSHING**



**P-TRAP  
4" (110mm)**



**GULLY TRAP  
4" x 3" x 1 1/2"**



**ACCESS CAP**


Under Ground - Orange Brown ( BSEN - 1401 )  
Cement & Soil - Cement Grey ( BSEN - 1329 )

# ASTM D-2466 SCHEDULE 40




ASTM STANDARD  
AMERICAN SOCIETY FOR TESTING & MATERIALS

Size inch	D mm	L mm	H mm
1 1/2	56.7	56.37	29.36
2	69.22	64.29	39.95
3	99.7	94.4	48.13
4	126.8	110.0	51.30
6	180.5	168.5	80.0




Size inch	D mm	H mm	Z mm
1 1/2	56.5	32	11
2	69	33	17
3	99.7	48.13	23.53
4	126.8	57.30	25.65
6	180.5	80.00	41.00

## BEND 45°




Size inch	D mm	L mm	Z mm
1 1/2	56.7	61.91	3.18
2	69.22	65.07	3.18
3	101.5	100.0	4.76
4	127.8	106.5	4.76
6	184.1	157.4	5.00

## COUPLING





Size inch	D mm	L mm	I mm	H mm	Z mm
4	126.8	275.6	193.5	51.3	30
6	180.5	410.20	285.52	85.0	40

## WYE eq. 45°



Size	D	d1	d2	d3	H	L1	L2
4 x 2	125.70	114.30	60.48	55.0	58.50	30.0	52.8
6 x 4	178.40	168.20	114.76	105.0	81.0	56.80	75.40

## REDUCER





# ASTM D-2466 SCHEDULE 40




ASTM STANDARD

AMERICAN SOCIETY FOR TESTING & MATERIALS


Size inch	D mm	L mm	H mm
1 1/2	59.0	121.7	36.0
2	73.20	139.0	38.0
3	99.7	94.4	48.13
4	126.8	220.0	51.3
6	180.5	337.0	80.0

**TEE . 90°**




**ELBOW 45° + SYPHON + P-TRAP**

Size inch	D mm	L mm	H mm
2	68.50	184.0	75.0
3	99.64	267.0	124.0
4	126.80	333.0	151.0




**TEE WITH DOOR**

Size inch	D mm	L mm	H mm
4	126.80	110.50	57




**BEND 90° WITH DOOR**

Size inch	D mm	L mm	Z mm
4	126.80	108.90	57



**END CAP**

Size inch	D mm	d mm	L mm	H mm
4	126.80	114.76	60	79.5



## ASTM D-2467 SCHEDULE 80





ASTM STANDARD

AMERICAN SOCIETY FOR TESTING & MATERIALS



Size inch	D mm	L mm	H mm
1/2	29.85	36.52	23.02
3/4	35.54	41.27	26.19
1	43.56	48.42	29.77
1 1/4	52.93	56.36	32.94

### ELBOW 90°

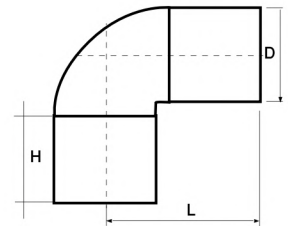


Size inch	D mm	L mm	Z mm
1/2	29.85	45.21	3.18
3/4	35.54	55.56	3.18
1	43.56	62.71	3.18
1 1/4	52.93	69.06	3.18

### COUPLING

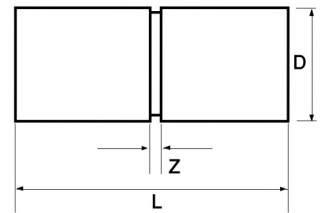


Size inch	D mm	L mm	H mm
1/2	29.85	73.03	23.02
3/4	35.54	82.55	26.19
1	43.56	96.84	29.77

### TEE eq. 90°

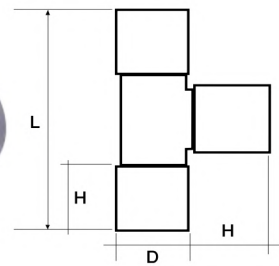

Size inch	D mm	L mm	Z mm
1/2	29.85	47.0	23.02
3/4	35.54	52.5	26.19
1	43.56	61.5	29.72

### MALE ADAPTOR








**ASTM STANDARD**

AMERICAN SOCIETY FOR TESTING & MATERIALS

## ASTM F-439 SCHEDULE 80 (CPVC)


Size inch	D mm	L mm	H mm
1/2	29.85	36.52	23.02
3/4	35.54	41.27	26.19
1	43.56	48.42	29.77
1 1/4	52.93	56.36	32.94

**ELBOW 90°**

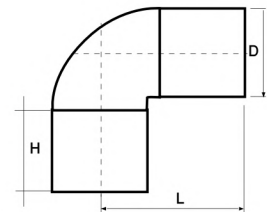


Size inch	D mm	L mm	Z mm
1/2	29.55	45.21	3.18
3/4	35.54	55.56	3.18
1	43.56	62.71	3.18
1 1/4	52.93	69.06	3.18

**COUPLING**




Size inch	D mm	L mm	H mm
1/2	29.85	73.03	23.02
3/4	35.54	82.55	26.19
1	43.56	96.84	29.77

**TEE eq. 90°**




Size inch	D mm	L mm	Z mm
1/2	29.85	47.0	23.02
3/4	35.54	52.5	26.19
1	43.56	61.5	29.77

**MALE ADAPTOR**



Size inch	D mm	D1 mm	S mm	S1 mm	L mm	w mm
1/2 X 1/2	21.24	20.10	21.05	14.00	75	3.73
3/4 X 1/2	26.63	20.10	21.05	14.00	80	3.91

**TEE BRASS INSERT 90**






ASTM STANDARD

AMERICAN SOCIETY FOR TESTING & MATERIALS

## ASTM F-439 SCHEDULE 80 (CPVC)


Size inch	D mm	D <sub>1</sub> mm	S mm	S <sub>1</sub> mm	L mm	W mm
1/2 X 1/2	21.50	18.50	24.00	16.50	60.00	3.73
3/4 X 3/4	26.87	24.40	25.00	17.50	70.00	3.91
1 x 1	33.50	30.50	28.00	20.50	80.00	4.55

### ELBOW BRASS INSERT 90°




Size inch	D <sub>1</sub> mm	S <sub>1</sub> mm	W mm	L mm
3/4 X 3/4	26.87	25.60	4.00	60
1 x 1	33.66	28.60	4.55	68

### UNION




Size inch	D mm	L mm	R mm
3/4x3/4	26.79	163.0	8.0
1x1	33.59	173.0	10.0

### CROSS OVER




Size inch	D mm	D <sub>1</sub> mm	S mm	S <sub>1</sub> mm	L mm	W mm
1x1	33.30	33.10	26.60	17.50	51	4.65
3/4 x 3/4	26.60	25.30	20.10	16.50	50.50	4.35
1/2 x 1/2	21.30	21.54	18.25	15.50	43.50	4.00

### MALE ADAPTER



Size inch	D mm	D <sub>1</sub> mm	S mm	S <sub>1</sub> mm	L mm	W mm
1/2 X 1/2	21.54	18.65	23.80	16.26	40	3.95
3/4 X 3/4	26.87	18.65	25.20	16.34	45	4.15

### FEMALE ADAPTER





### DIN 8063 PN 10

#### ELBOW WITH DOOR PVC



Dimensions mm					KG/PCS
D	H	W	A°		
75 mm	130	88	41.00	87.5°	0.300
110 mm	178	126	51.00	87.5°	0.723
160 mm	252	180	71.00	87.5°	1.550
160 mm	252	180	71.00	87.5°	1.465

#### ELBOW PVC 45°



Dimensions mm					KG/PCS
D	H	W	L	A°	
50 mm	98.7	61	28.00	45°	0.088
75 mm	136.8	88	41.00	45°	0.200
110 mm	181	126	51.00	45°	0.500
160 mm	260	180	71.00	45°	1.122

#### SOCKET PVC



Dimensions mm					KG/PCS
D	H	W	L	A°	
50 mm	60	61	28.00	N/A	0.060
75 mm	87	88	41.00	N/A	0.142
110 mm	108	126	51.00	N/A	0.332
160 mm	150	180	71.00	N/A	0.758

#### REDUCER SOCKET PVC



Dimensions mm					KG/PCS
D	H	W	L	A°	
110/50 mm	105	110.1	28.00	N/A	0.191
110/75 mm	117	110.1	41.00	N/A	0.223
160/110 mm	175	160.3	51.00	N/A	0.570

#### SOCKET WITH DOOR PVC



Dimensions mm					KG/PCS
D	H	W	L	A°	
50 mm	55	50.1	N/A	N/A	0.057
75 mm	72	75.1	N/A	N/A	0.136
110 mm	87	110.1	N/A	N/A	0.290
160 mm	120	160.3	N/A	N/A	0.509

#### TEE PVC



Dimensions mm					KG/PCS
D	H	W	A°		
50 mm	127	61	28.00	87.5°	0.161
75 mm	189	88	41.00	87.5°	0.400
110 mm	248	126	51.00	87.5°	0.958
160 mm	346	180	71.00	87.5°	2.162

## THERMAL PPR


Size mm	D mm	L mm	Z mm
20	29.0	31.0	3.18
25	34.0	37.0	3.18
32	43.0	43.0	3.18
40	52.0	48.0	3.18
50	67.0	53.0	3.18

### COUPLING




DIN STANDARD

DEUTSCHES INSTITUTE FOR NORMUNG

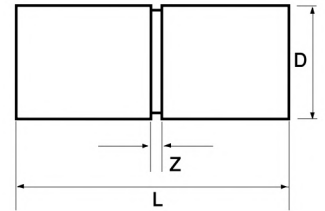


Size mm	D mm	L mm	H mm
20	29.0	40.0	23.02
25	34.0	46.0	26.19
32	43.0	56.0	29.77
40	52.0	67.0	32.94
50	67.0	83.0	

### ELBOW 90°




Size mm	D mm	L mm	H mm
20	29.0	51.0	40.0
25	34.0	58.0	46.0
32	43.0	69.0	56.0
40	52.0	82.0	67.0
50	67.0	99.0	83.0

### TEE eq. 90°



Size mm	D mm	H mm	L mm
20	20	50.0	354.0
25	25	55.0	357.0
32	232	64.0	357.0


### CROSS OVER

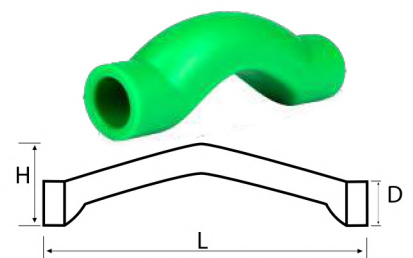




Size mm	D mm	H mm	D1 mm
25x20	34.0	36.50	29.0
32x20	32.0	43.0	29.0
40x25	40.0	48.0	34.0
50x32	50.0	55.0	43.0
50x40	52.0	55.0	50.0

**REDUCER**

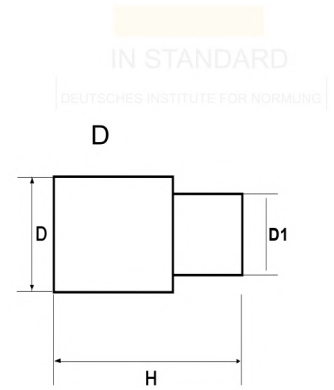


Size mm	D mm	H mm
20	29.0	44.5
25	34.0	50.5
32	43.0	60.0
40	52.0	70.6
50	67.0	86.6

**ELBOW 45°**




Size inch	D1 mm	D2 mm	D3 mm	H mm	L mm
1/2 X 1/2	30.45	0.5	38	22.45	78
3/4 X 1/2	36.1	0.5	38	22.95	80

**TEE BRASS INSERT 90°**

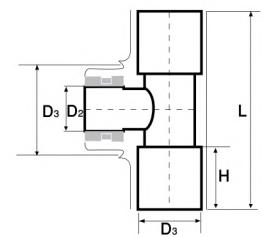


Size inch	D1 mm	D2 mm	D3 mm	H mm	L mm
1/2 X 1/2	30.45	0.5	38	22.45	28
3/4 X 1/2	36.1	0.5	38	22.95	33
1 X 1	43.50	0.5	40	30.45	42

**ELBOW BRASS INSERT 90°**

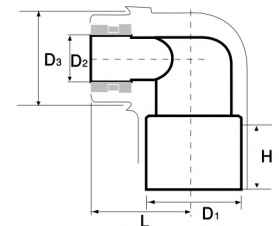



Size mm	d mm	mm	Z mm	L mm
20	19.00	29.00	14.50	48.00
25	24.00	34.00	16.00	55.00
32	31.00	43.00	18.00	72.00
40	39.00	52.00	20.00	75.00
50	49.00	67.00	23.50	86.00

UNION PPR




Size mm	D mm	H mm
20	27.00	22.50
25	33.00	26.00
32	41.00	28.00
40	51.00	36.50
50	65.00	43.00

UNION MALE ADAPTER




Size mm	D mm	H mm
20	27.0	22.50
25	33.0	26.0
32	41.0	28.0
40	51.0	36.0
50	65.0	43.0

UNION FEMALE THREADED



Size inch	G inch	D mm	h mm	H mm
1/2"	1/2"	30.0	13.0	52.0

TEST PLUG






**THERMAL PPR**



STOP VALVES

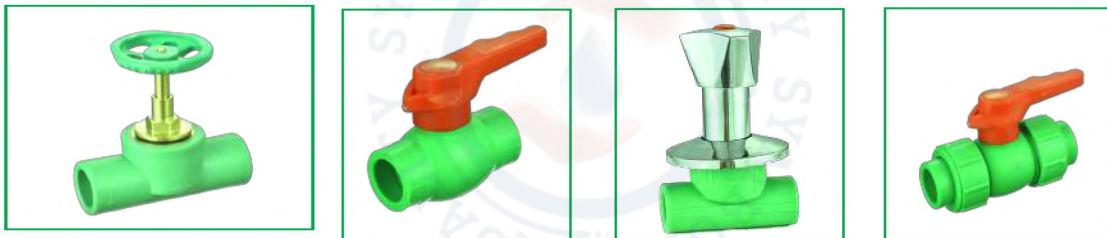

END PLUG





# الراجحي AL-RAJHI



[alrajhi@alrajhipipes.com](mailto:alrajhi@alrajhipipes.com)  
[info@alrajhipipes.com](mailto:info@alrajhipipes.com)  
[www.alrajhipipes.com](http://www.alrajhipipes.com)



CONSISTENT TO INTERNATIONAL STANDARDS